

ASCENDA SIZE "XL" ELEVATOR SPECIFICATIONS

GENERAL:

- TRAVEL: xxx
- OVERHEAD: xxx
- SPEED: 30 FPM
- LOAD CAPACITY: 770 lbs
- STOPS: TWO
- SINGLE OPENING (A SIDE)

CAR FEATURES:

- 33 $\frac{7}{16}$ " W X 49 $\frac{3}{16}$ " D CAR SIZE
- 78 $\frac{11}{16}$ " INTERIOR CAR HEIGHT
- WHITE/BLACK TEXTURE POWDER COATED CAB WITH CLEAR LAMINATED SAFETY GLASS VISION PANELS
- 2 HANDRAILS (W/ INTEGRATED CONTROLS)
- BLACK CAR ACCENT STRIP
- CHARCOAL FORGO FLOORING
- (4) ENERGY SAVING RECESSED LED LIGHT WITH SILVER TRIM RINGS
- (1) 78 $\frac{5}{16}$ " CLEAR LAMINATED SAFETY GLASS SALOON DOORS
- FLIP DOWN SEAT

FIXTURES:

- BLACK ACRYLIC CAR OPERATING PANEL (COP) WITH WITH INTEGRATED KEYPAD PHONE AND STATUS DISPLAY, UP/DOWN ARROW BUTTONS, AND ALARM BUTTON
- SILVER ALUMINUM HANDRAIL WITH CONTROLS, UP/DOWN ARROW BUTTONS, DOOR OPEN BUTTON, IN CAR EMERGENCY STOP BUTTON AND FAN KNOB
- (2) WIRELESS HALL STATIONS WITH UP/DOWN ARROW BUTTONS AND DOOR OPEN BUTTON

MECHANICAL EQUIPMENT:

- MODULAR EXTRUDED ALUMINUM RAIL STRUCTURE
- CAR FRAME ASSEMBLY
- 230 VAC, 60Hz, 30 AMP SINGLE PHASE POWER SUPPLY
- 24 MM PITCH SCREW DRIVE SYSTEM
- INTEGRATED FREQUENCY INVERTER DRIVE SYNCHRONOUS MOTOR

ELECTRICAL:

- MAIN LINE: 230 V, 60Hz, , 30 A, SINGLE PHASE
- CAR LIGHT (OPTIONAL): 115 V, 60Hz, 15 A, SINGLE PHASE

SAFETY DEVICES:

- SAFETY NUT
- BELT MONITOR
- ONE UPPER AND ONE LOWER FINAL LIMITS
- IN-CAR EMERGENCY STOP SWITCH AND ALARM
- CAR DOOR LOCKING DEVICE FOR CAR GATE(S)
- BATTERY BACK UP EMERGENCY CAR LIGHT AND ALARM
- TOP CAR OBSTRUCTION SAFETY DEVICE
- BOTTOM CAR OBSTRUCTION SAFETY DEVICE
- HATCH OBSTRUCTION SAFETY DEVICE
- BATTERY LOWERING SYSTEM
- OVERLOAD SENSOR
- MANUAL LOWERING DEVICE



CONTROLS:

- CONSTANT PRESSURE OPERATION
- SELF DIAGNOSTIC SYSTEM WITH DIAGNOSTIC LED

OPTIONAL INCLUDED FEATURES:


- IoT MODULE - WI-FI AND SIM CARD
- EMBEDDED TOWER LED LIGHT STRIP
- INTEGRATED FAN
- MIRROR FINISH CEILING
- CONTROL BUTTONS - DUAL COLOR
- ACCENT CAR PANEL WITH RECESSED LIGHT
- CONTROL BOX LOCATION: A SIDE/C SIDE/REMOTE (2 BENDS MAXIMUM)

CIBES SYMMETRY			
TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

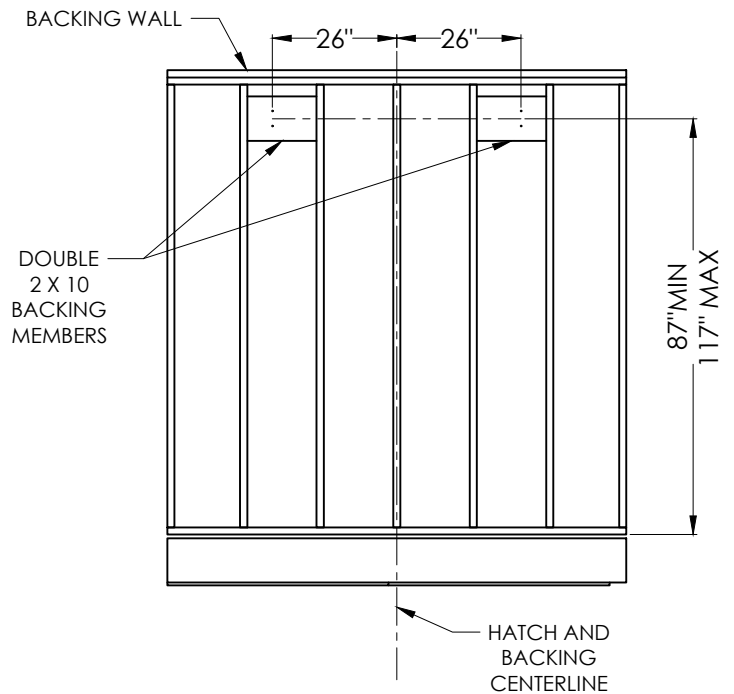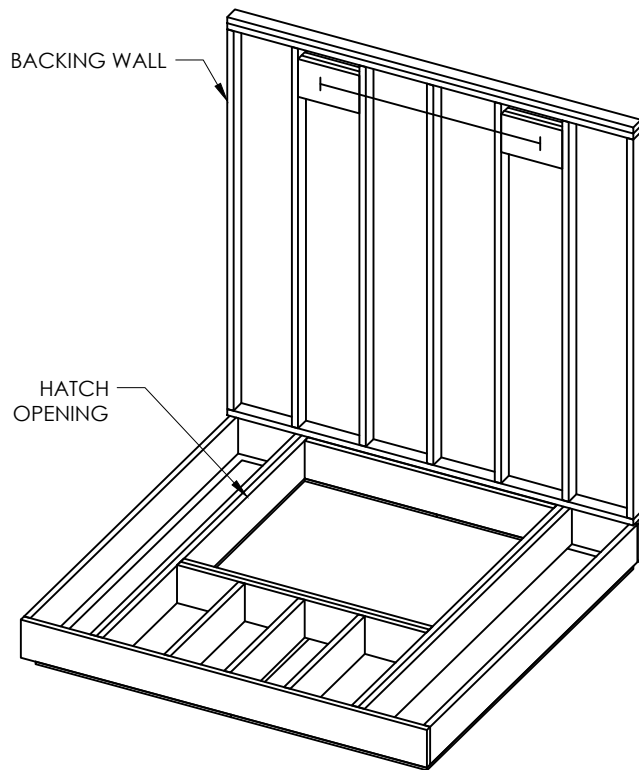

BACKING NOTES:


1. WALLS TALLER THAN 8' REQUIRE DOUBLED 2X4 STUDS OR 2X6 WALL CONSTRUCTION
2. USE GLUE OR CONSTRUCTION ADHESIVE ON ALL JOINED SURFACES
3. USE #8 X 2.5" WOOD SCREWS FOR THE 2 X 4'S
4. USE #10 X 3" WOOD SCREWS FOR THE 2 X10'S

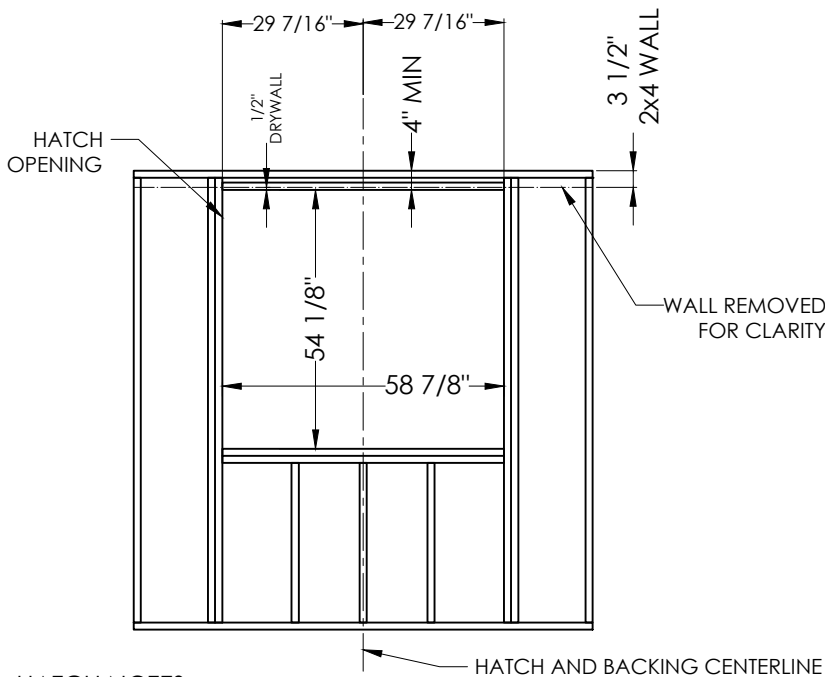

HATCH NOTES:

1. 3/4" SUBFLOOR AND 2X4 WALL REMOVED FOR CLARITY
2. JOIST HANGERS AS REQUIRED BY LOCAL BUILDING CODE
3. INSIDE SURFACE OF THE HATCH TO BE SOLID UNFINISHED MATERIAL
4. CUT SUBFLOORING FLUSH TO HATCH OPENING
5. ENSURE HATCH OPENING IS AT LEAST DRYWALL THICKNESS AWAY FROM STUD WALL ON BACKING WALL SIDE.
6. ENSURE HATCH OPENING IS AT LEAST 2 3/16" AWAY FROM WALL MOUNTED PROTRUSIONS OR WINDOW SILLS, CURTAINS ON OTHER THREE SIDES.

BACKING MEMBER CONSTRUCTION DETAILS

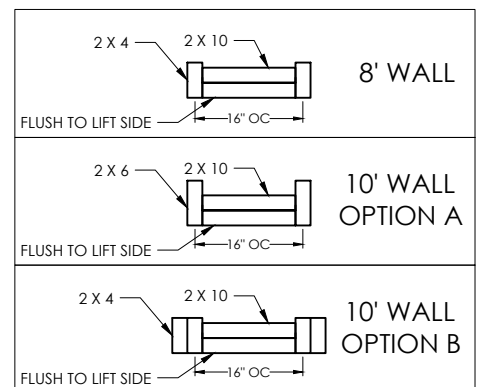


CIBES SYMMETRY


TITLE TFL-XL ASCENDA BACKING DETAIL R3			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

* THE HATCH FLANGE WILL REST ON THE UPPER LANDING FINISHED FLOOR.

CRASH WARNING: TO ENSURE UNOBSTRUCTED OPERATION, NO ITEMS SUCH AS FLOOR OR CEILING TRIM, PICTURES, WINDOW SILL, ETC, SHOULD BE IN THE AREA OF THE ELEVATOR OR HATCH FLANGE. WE RECOMMEND AT LEAST 1" FROM ANY OBSTRUCTION TO THE HATCH FLANGE.

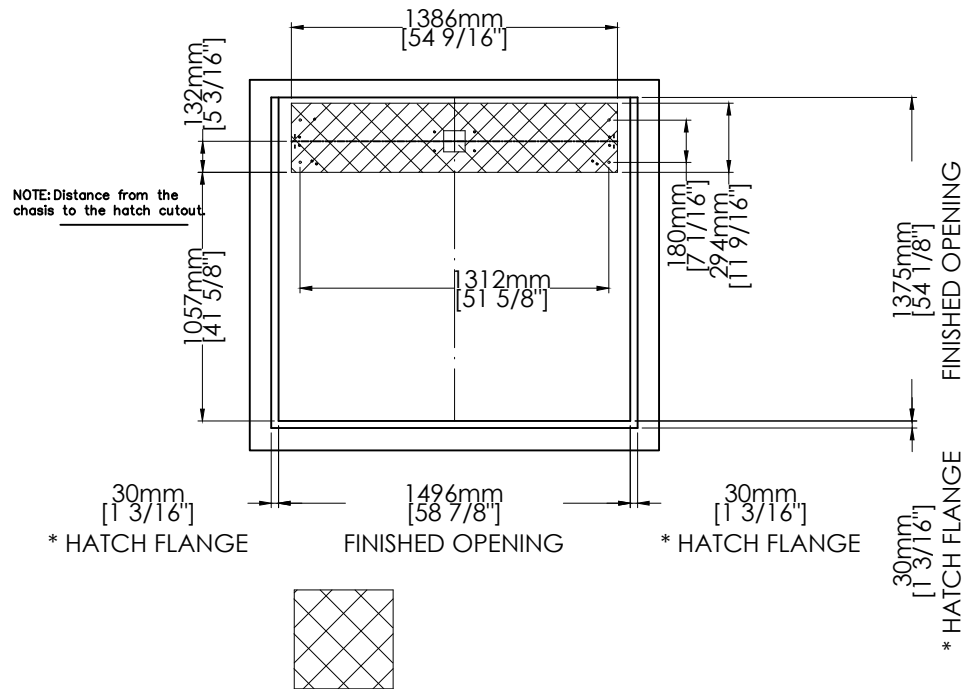

Section force (include rated load): 3234 lbs
 Section area: 4.3ft²
 Force per square foot: 752 lbs/ft²


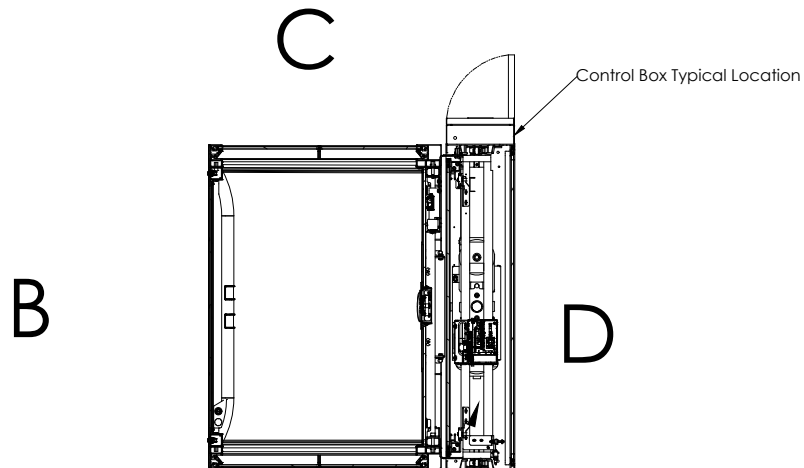


A

CIBES SYMMETRY

TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			


Walls of bricks, terra-cotta, hollow blocks, and similar materials shall not be used for attachment of guide-rail brackets unless they are adequately reinforced. Pull out force 300 lbs

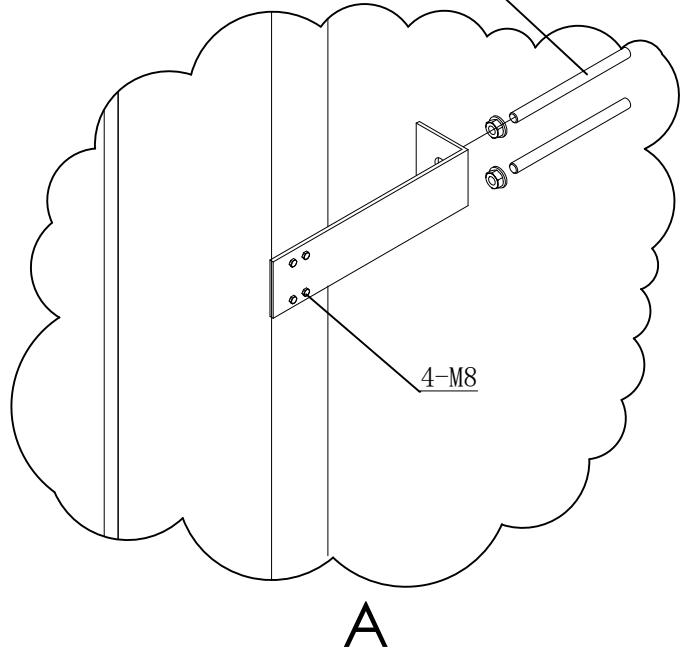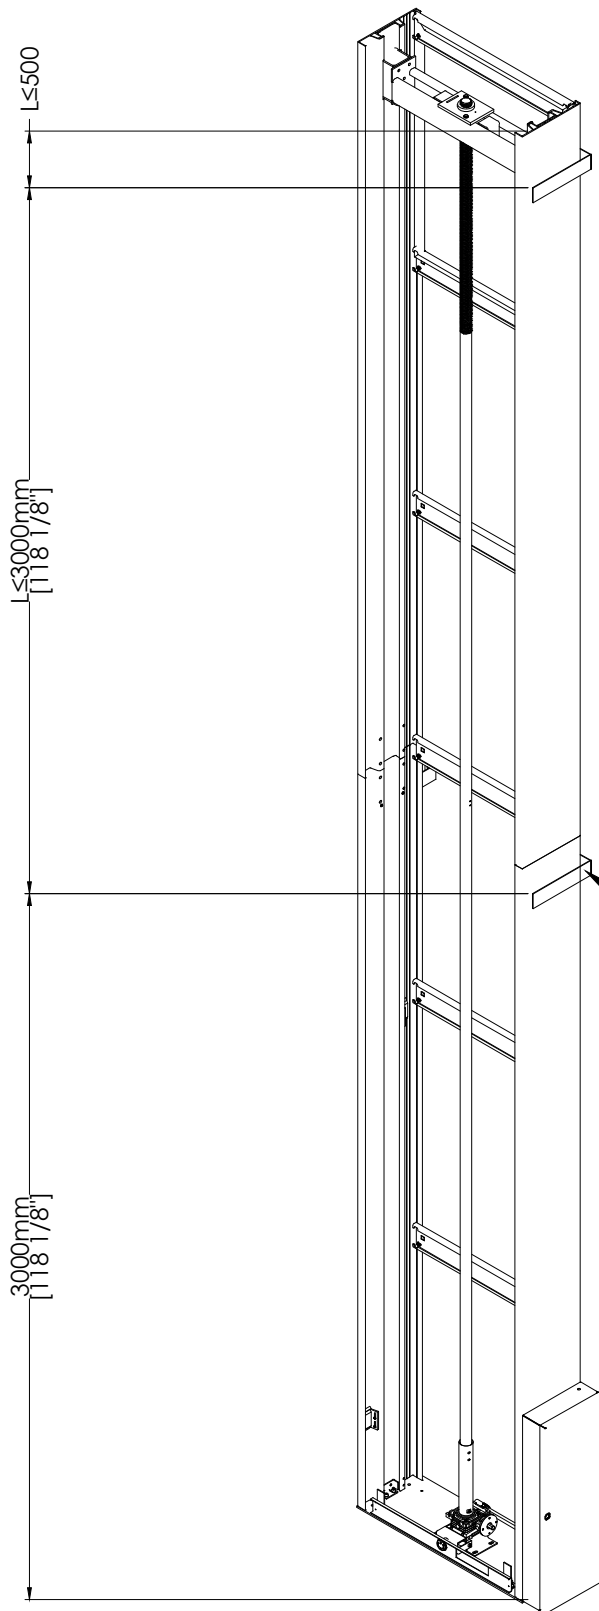

300 lbs in total per side,
600 lbs per fixing area
See detail A

CIBES SYMMETRY

TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY	DATE	DRAWING NO.	REV
DRAWN_BY	DRAWN_DATE	DRAWING_NO	REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

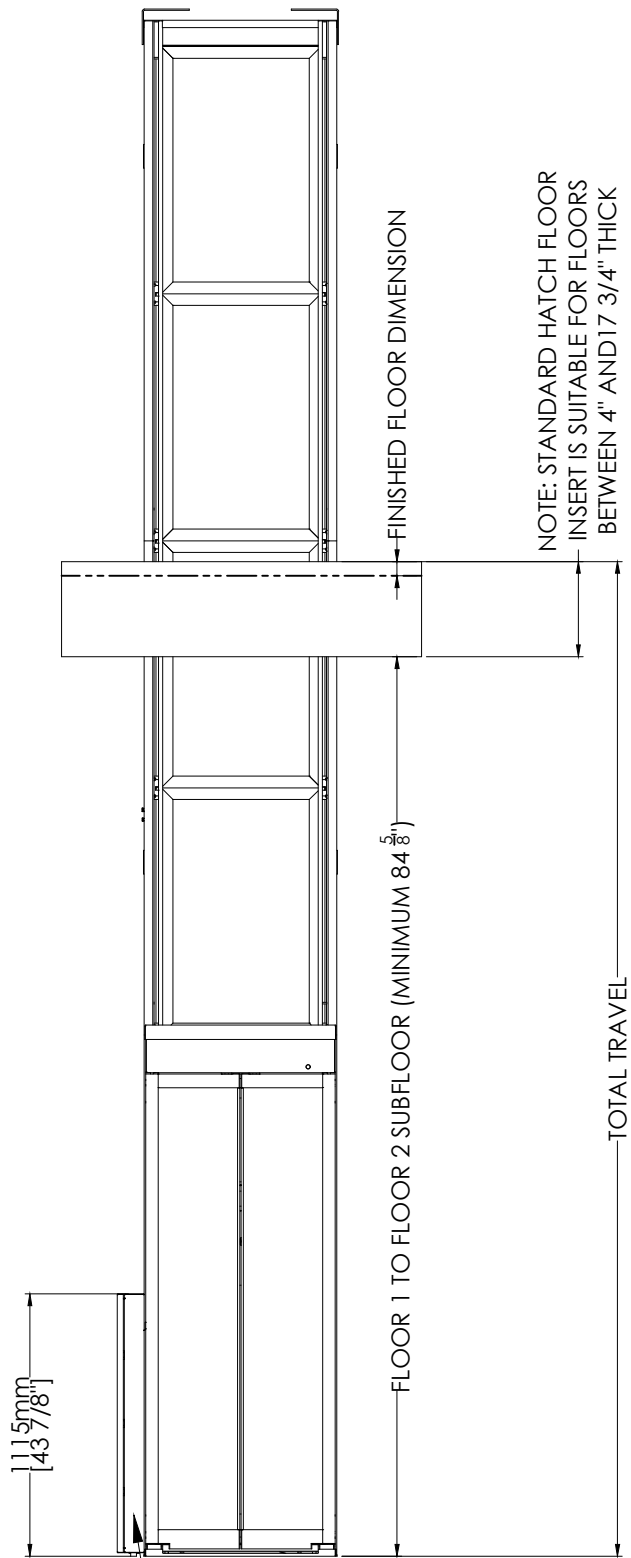

NOTES:

- 1) CONSULT LOCAL AUTHORITY TO ENSURE COMPLIANCE WITH STATE AND LOCAL CODES.
- 2) MAXIMUM TRAVEL IS 14' (168")
- 3) MINIMUM FLOOR 1 TO FLOOR 2 SUB FLOOR MEASUREMENT IS 84 5/8".
- 4) OVERHEAD NOTES:
 - MINIMUM OVERHEAD IS 7'8" (92") WITH STANDARD EQUIPMENT
 - ENGINEERING REVIEW IS REQUIRED IF OVERHEAD EXCEEDS 100 1/4" AND UNIT WILL ATTACH TO 2x4 WALL STUDS

JOB SPECIFIC INFORMATION:



OVERHEAD

TOTAL TRAVEL
FLOOR 1 TO 2




PAGE 5 Note: Control box shown on C side.

CIBES SYMMETRY

TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

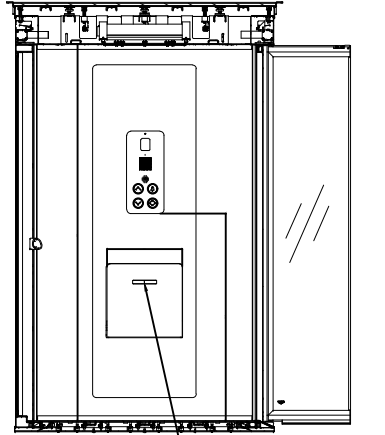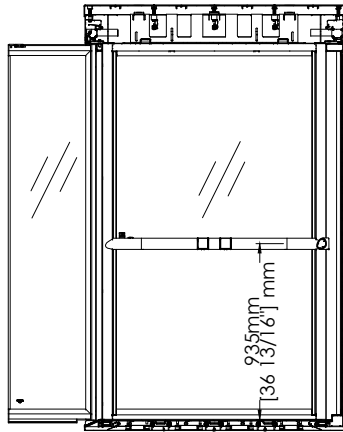



Fold down seat handle

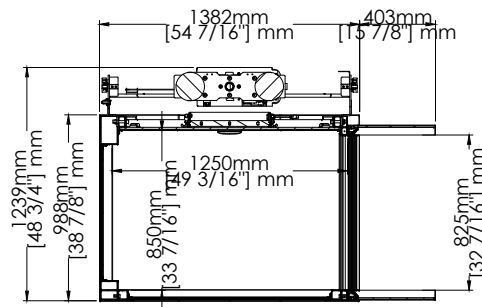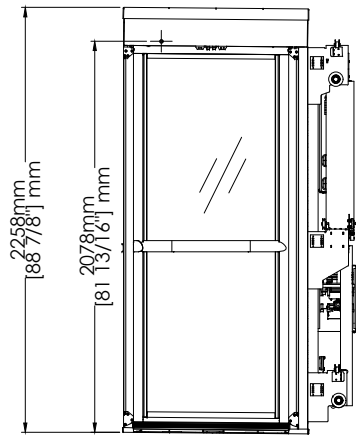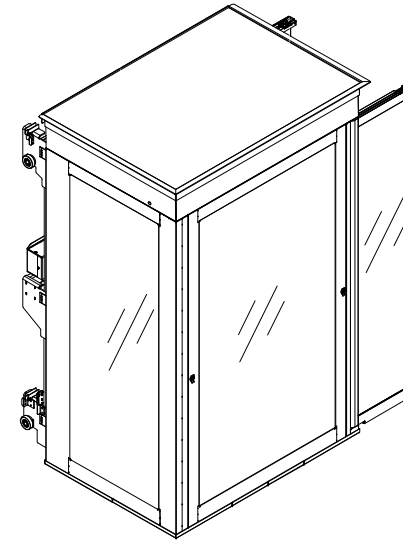

CIBES SYMMETRY			
TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			


OPTIONAL CONTROLLER LOCATIONS

NOTE:
The maximum number bends is two.

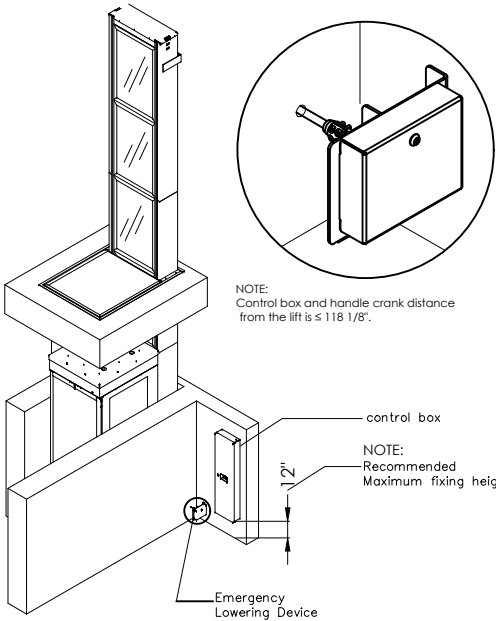


NOTE:
Control box and handle crank distance
from the lift is $\leq 118 \frac{1}{8}$ ".

NOTE:
Recommended
Maximum fixing height.

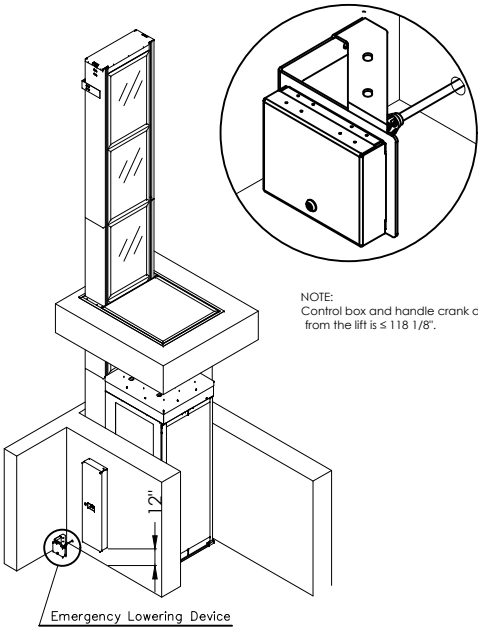


NOTE:
Control box and handle crank distance
from the lift is $\leq 118 \frac{1}{8}$ ".

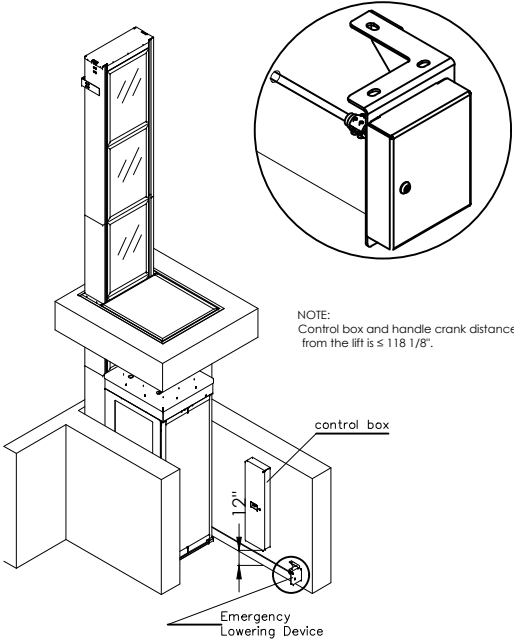

NOTE:
Control box and handle crank distance
from the lift is $\leq 118 \frac{1}{8}$ ".

CIBES SYMMETRY			
TITLE ASCENDA TFL-XL			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

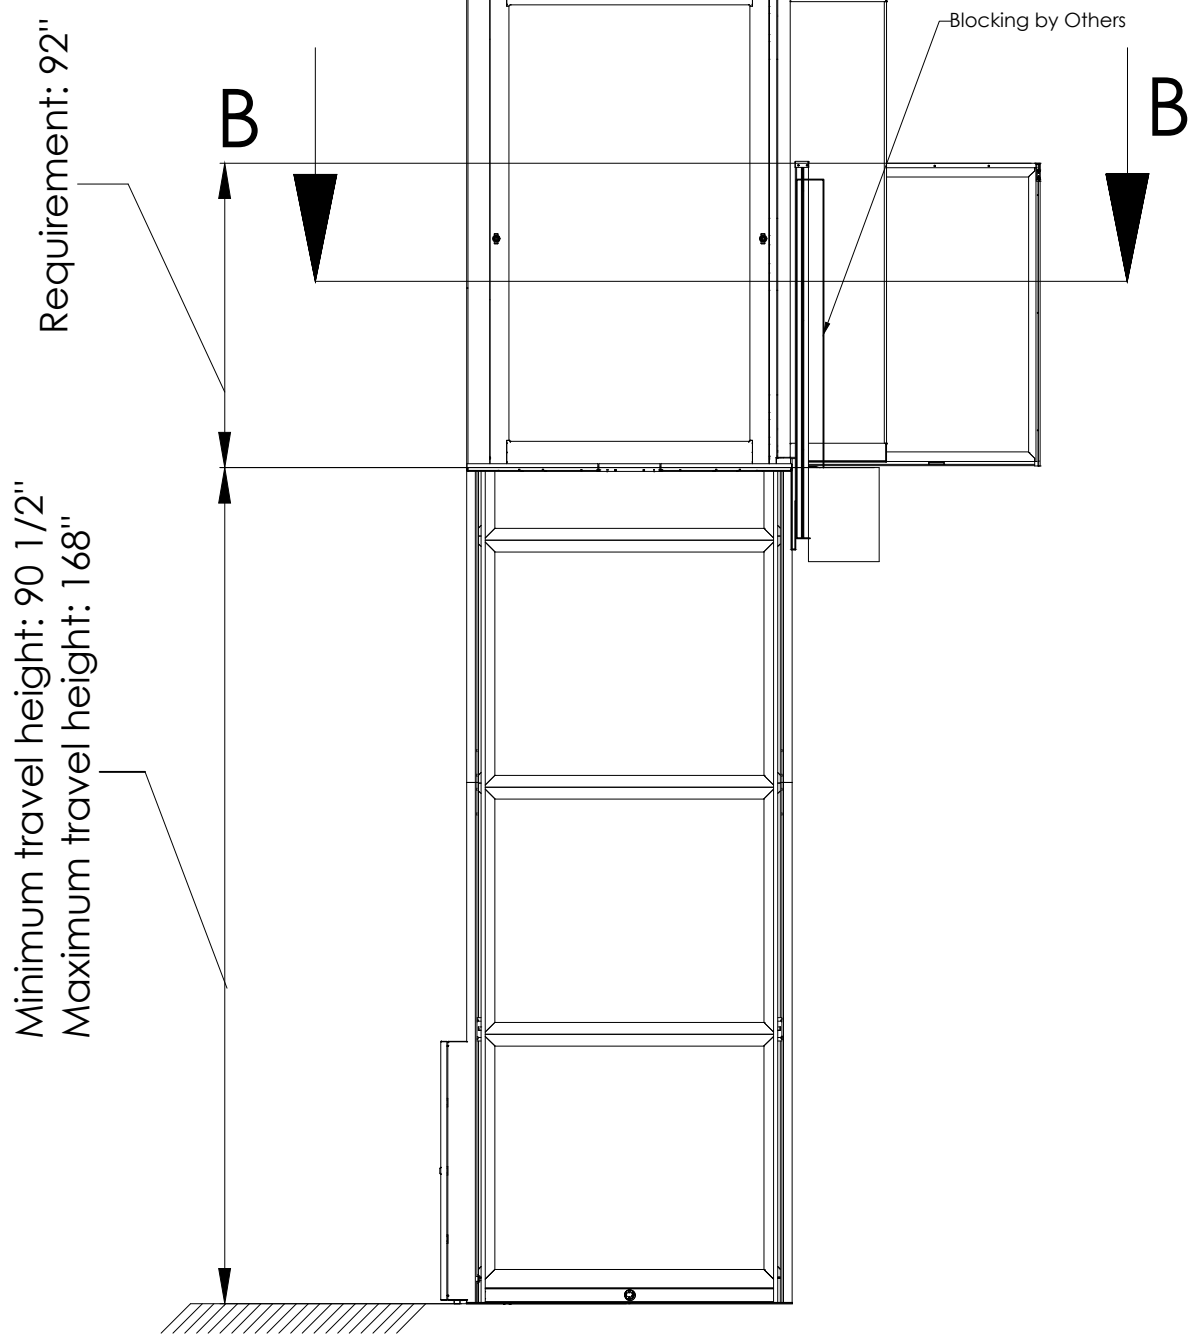


OPTIONAL LANDING GATE

CIBES SYMMETRY

TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO

JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

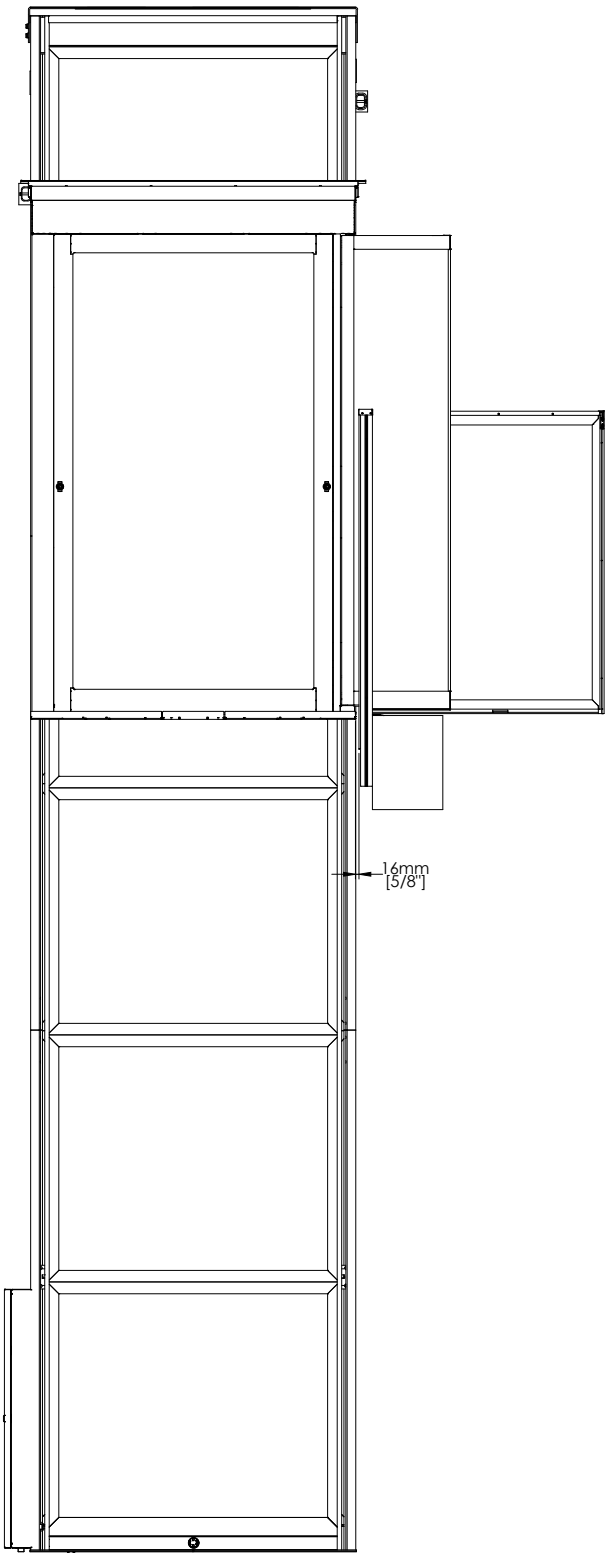


OPTIONAL LANDING GATE


CIBES SYMMETRY			
TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY DRAWN_BY	DATE DRAWN_DATE	DRAWING NO. DRAWING_NO	REV REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			

Required cuts by
others

CASE 1:B-B (1 : 1)

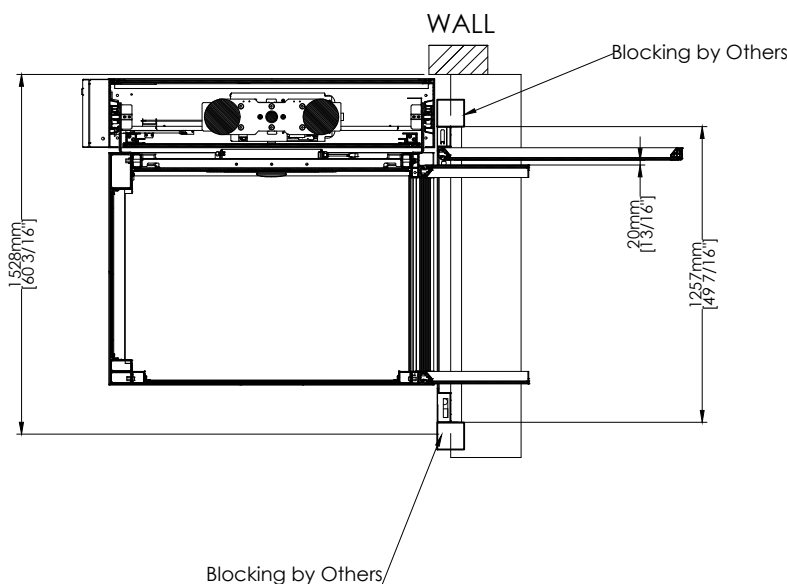

CASE 2:B-B (1 : 1)

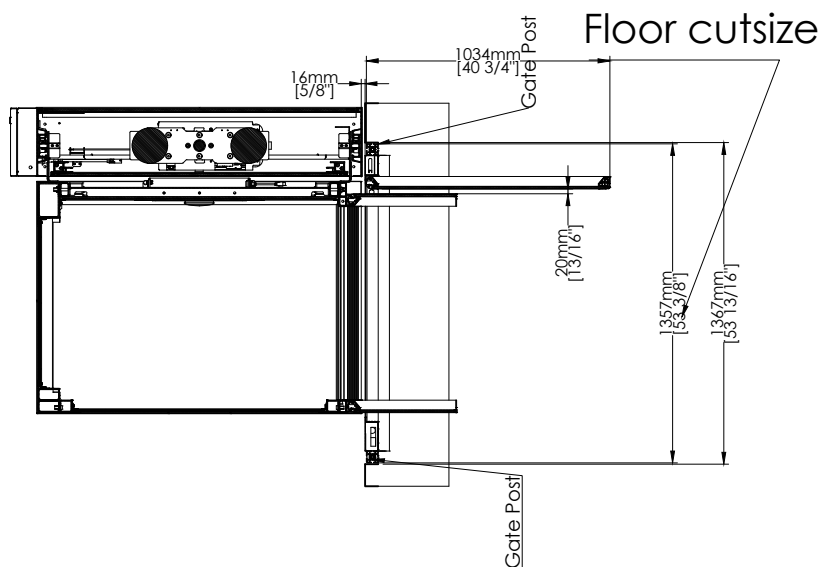

Gate support posts are suitable for masonry construction only an should not be used for non-masonry construction.

OPTIONAL LANDING GATE

CIBES SYMMETRY			
TITLE ASCENDA TFL-XL/A			SCALE NONE
DRAWN BY	DATE	DRAWING NO.	REV
DRAWN_BY	DRAWN_DATE	DRAWING_NO	REV_NO
JOB INFORMATION			
JOB_REFERENCE			
JOB_ADDRESS			
JOB_CITY_ST_ZIP			